

# ACCESSORY KIT INSTALLATION INSTRUCTIONS


## Contactor Enclosure Kit - 1CE0701 (DNP, DYP, DNA, DNH, DYA, DYH)

Kit contains:

- Sheet Metal Cover
- 4 - Self-Tapping Screws
- Gasket Strip
- Plastic Electrical Tubing
- Plastic Tie Wraps


Step 1. Disconnect power to unit.

Step 2. Remove electrical panel on unit and locate contactor on lower shelf, left side. (See Fig. 1)

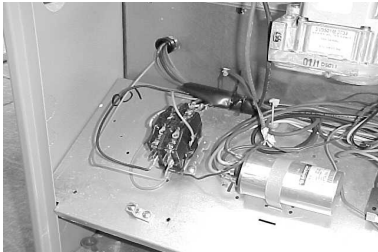

**FIGURE 1 - CONTACTOR LOCATION**

Step 3. Cut the plastic electrical tubing lengthwise and cover existing wires to ensure they are protected from any sharp edges. Use the plastic tie wraps to secure the tubing. (See Fig. 2)

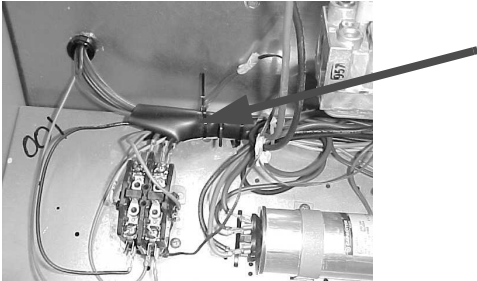

**FIGURE 2 - PLASTIC ELECTRICAL TUBE**


Step 4. Per illustration, apply gasket strip to three sides of flange on sheet metal cover. (See Fig. 3)



**FIGURE 3 - GASKET STRIP APPLICATION**

Step 5. Attach sheet metal cover by using self-tapping screws provided. (See Fig. 4)

Step 6. Re-attach electrical panel and re-connect power to the unit.

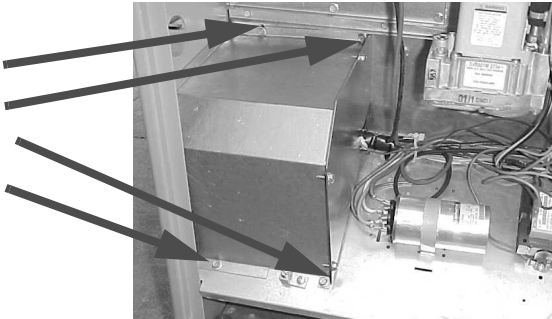

**FIGURE 4 - METAL COVER ATTACHMENT**

---

Subject to change without notice. Printed in U.S.A.

Copyright © by Unitary Products Group 2003. All rights reserved.

Supersedes: 035-18437-000-A-0801

035-18437-001-A-0503

---

**Unitary  
Products  
Group**

**5005  
York  
Drive**

**Norman  
OK  
73069**